

# SiteShield Axis LPR Base

All-In-One Outdoor Surveillance Solution


Deployment for Anywhere with Power

5G Connection

SS-KG1-B1ALP-3Y-5G

## SiteShield Axis LPR Base w/ 3Y Licenses Includes:

- 1x NEMA Enclosure System and Accessory with Built-in Thermostat Heater and Fan
- 1x 6 Ports POE Switch(4 POE Ports, 2 Data Ports)
- 1x 5G LTE Router with 4 Ports
- 2 x Strobe Lights
- SiteShield License include 3Y Axis LPR Premium License for 1 Camera in SiteShield, 3Y SiteShield Management License(Remote Power Control, Virtual Guard Dashboard) and Warranty

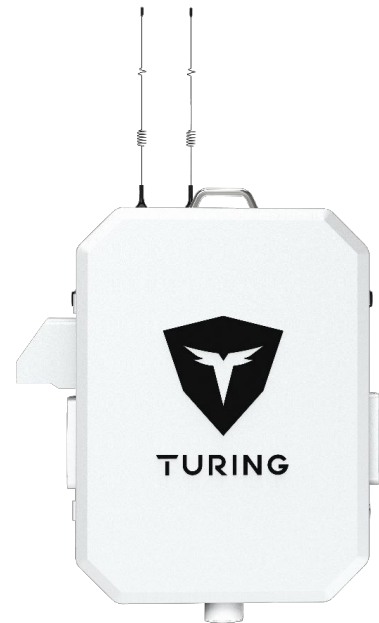

SIM Carriers Certified by



T Mobile

verizon

FIRSTNET  
Built with AT&T

SIM Card Acquired  
Separately

# SPECIFICATIONS

SS-KG1-B1ALP-3Y-5G

## GENERAL

Dimensions (HxWxD) 23.8" x 19.1" x 10.4"(605 x 485 x 265mm)

Weight 40lbs(without camera)

Working Environment -30~60°C (-22~140°F), Humidity ≤ 90% RH (non-condensing)

Rating NEMA3R

## POWER

Power AC110V  
Power consumption: ~64W(without camera)

Power Interface Cable Conduit Connector

## HEAT AND FAN

Heat Heater Capacity: 150W  
Heater turn on at 59°F(15°C)

Fan MTBF: 10 years  
Fan turn on at 86°F(30°C)

## NETWORK (CELLULAR)

Standard and Band Standard 5G Bands

Antenna Interface Cellular: 2 \* Standard SMA female antenna interface, characteristic impedance: 50 Ω

SIM/UIM Slot Standard drawer-type user card interface

## NETWORK(POE SWITCH)

Ports 2\*10/100Base-TX RJ45 ports (Data)  
4\*10/100Base-TX PoE ports (Data/Power)

Max Power Per Port 30W, IEEE802.3af/at

Power Consumption Standby:<3W, Full load:af<60W, at<120W


## MOUNT OPTIONS Pole Mount

3.9 into 11.8 in dia Stainless Steel Adjustable Clamp x4 (Included)



## MOUNT OPTIONS Wall Mount

M8 x 80  
(Not included in Product)



## Camera MOUNT OPTIONS

### Side Mount Bracket: TA-AXSIDEBR

Bracket designed to mount Axis Camera on either the left or right side of the enclosure.  
Cameras are not included.

#### TA-AXSIDEBR

Side Mount adapter for Axis Camera  
179x179x25 mm



The bracket comes in its own packaging and includes all necessary accessories:

- Installation manual
- Screws:
  - M4 × 14 mm (×4)
  - M5 × 14 mm (×4)
  - M8 × 25mm (×4)

AXIS TQ5001-E Wall-and-Pole Mount



M55

AXIS TQ1003-E Wall Mount



Q16/P13



P14



Q17/Q18



P32

### Bottom Mount Bracket: TA-AXBOTMBR

Bracket designed to mount Axis Camera on bottom of the enclosure.  
Cameras are not included.

#### TA-AXBOTMBR

Bottom Mount adapter for Axis Camera  
102\*102\*35mm



The bracket comes in its own packaging and includes all necessary accessories:


- Installation manual
- Screws:
  - M4 × 14 mm (×4)
  - M5 × 14 mm (×4)



P32



P14

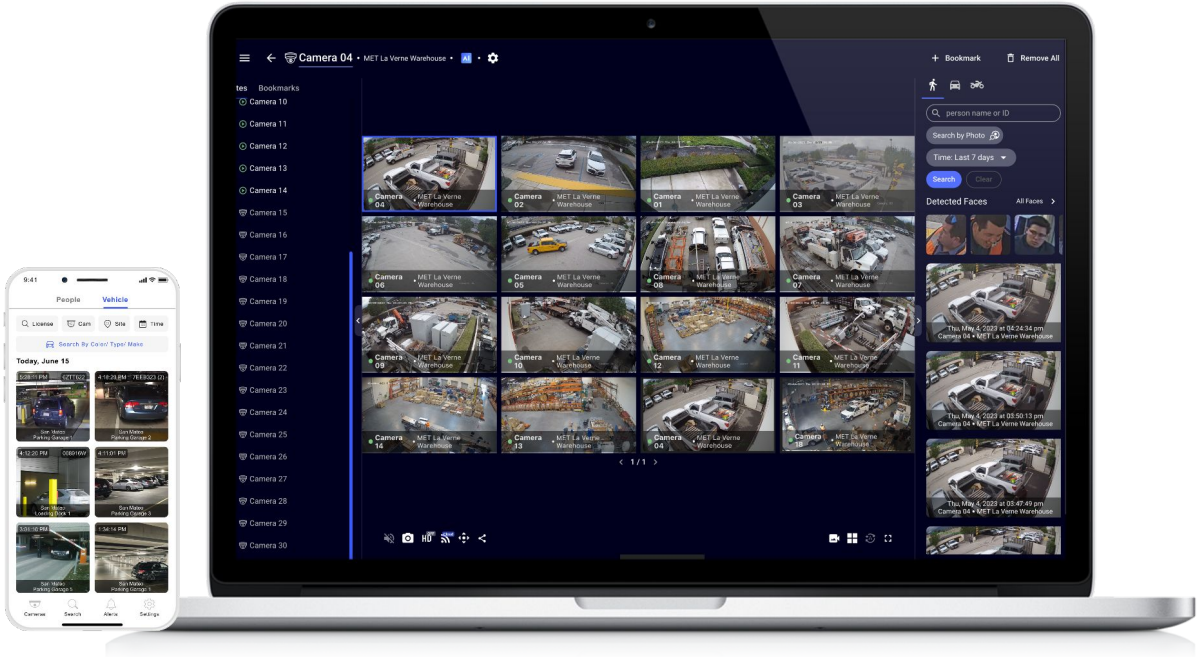

## KEY FEATURES



Receive Instant Smart Alerts for Intruders/Trespassers/Person of Interest/Vehicle of Interest via SMS/Email/Push Notifications

Remote Live Stream Monitoring



- Remote Live Streaming up to 16 Cameras in HD
- Bookmark and Auto-Cycle Play for Live Monitoring



Share Live Camera Streams With First Responders



Find Events Fast with Smart Video Search and Archive/Share for Future Reference



View Live Footage From any Desktop / Mobile Device



Flexible Hybrid Storage Locally or on the Cloud