

SiteShield Axis Base


All-In-One Outdoor Surveillance Solution

Deployment for Anywhere with Power
5G Connection

SS-KG1-B3A-3Y-5G

SiteShield Axis Base w/ 3Y Licenses Includes:

- 1x NEMA Enclosure System and Accessory with Built-in Thermostat Heater and Fan
- 1x 6 Ports POE Switch(4 POE Ports, 2 Data Ports)
- 1x 5G LTE Router with 4 Ports
- 2 x Strobe Lights
- 3Y SiteShield License include Axis Core License for All Cameras in SiteShield, SiteShield Management License(Remote Power Control, Virtual Guard Dashboard) and Warranty

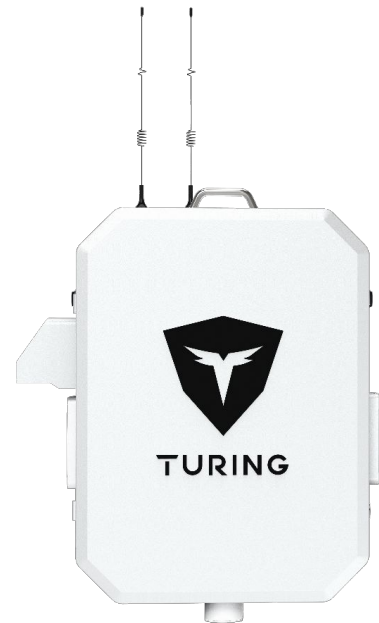

SIM Carriers Certified by



SIM Cards Acquired Separately

SPECIFICATIONS

GENERAL

Dimensions (HxWxD) 23.8" x 19.1" x 10.4"(605 x 485 x 265mm)

Weight 40lbs(without camera)

Working Environment -30~60°C (-22~140°F), Humidity ≤ 90% RH (non-condensing)

Rating NEMA3R

POWER

Power AC110V
Power consumption: ~64W(without camera)

Power Interface Cable Conduit Connector

HEAT AND FAN

Heat Heater Capacity: 150W
Heater turn on at 59°F(15°C)

Fan MTBF: 10 years
Fan turn on at 86°F(30°C)

NETWORK (CELLULAR)

Standard and Band Standard 5G Bands

Antenna Interface Cellular: 2 * Standard SMA female antenna interface, characteristic impedance: 50 Ω

SIM/UIM Slot Standard drawer-type user card interface

NETWORK(POE SWITCH)

Ports 2*10/100Base-TX RJ45 ports (Data)
4*10/100Base-TX PoE ports (Data/Power)

Max Power Per Port 30W, IEEE802.3af/at

Power Consumption Standby:<3W, Full load:af<60W, at<120W


MOUNT OPTIONS Pole Mount

3.9 into 11.8 in dia Stainless Steel Adjustable Clamp x4 (Included)



MOUNT OPTIONS Wall Mount

M8 x 80
(Not included in Product)



SPECIFICATIONS

Camera MOUNT OPTIONS

Side Mount Bracket: TA-AXSIDEBR

Bracket designed to mount Axis Camera on either the left or right side of the enclosure.
Cameras are not included.

TA-AXSIDEBR

Side Mount adapter for Axis Camera
179x179x25 mm



AXIS TQ5001-E Wall-and-Pole Mount



M55

AXIS TQ1003-E Wall Mount



Q16/P13



P14



Q17/Q18



P32

The bracket comes in its own packaging and includes all necessary accessories:

- Installation manual
- Screws:
 - M4 × 14 mm (x4)
 - M5 × 14 mm (x4)
 - M8 × 25mm (x4)

SPECIFICATIONS


Camera MOUNT OPTIONS

Bottom Mount Bracket: TA-AXBOTMBR

Bracket designed to mount Axis Camera on bottom of the enclosure.
Cameras are not included.

TA-AXBOTMBR

Bottom Mount adapter for Axis Camera
102*102*35mm



P32



P14

The bracket comes in its own packaging and includes all necessary accessories:

- Installation manual
- Screws:
 - M4 × 14 mm (×4)
 - M5 × 14 mm (×4)

Bottom Pipe Mount Bracket: TA-AXPTZBR

Bracket design for Axis PTZ camera or Multi-Sensor Camera

TA-AXPTZBR

Mount adapter for Axis PTZ or multi-sensor
65*60*60MM

G1 1/2



AXIS T94A01D



Q63

AXIS T94N01D




P37

The bracket comes in its own packaging and includes all necessary accessories:

- Installation manual

24/7 SECURITY POWERED BY AI

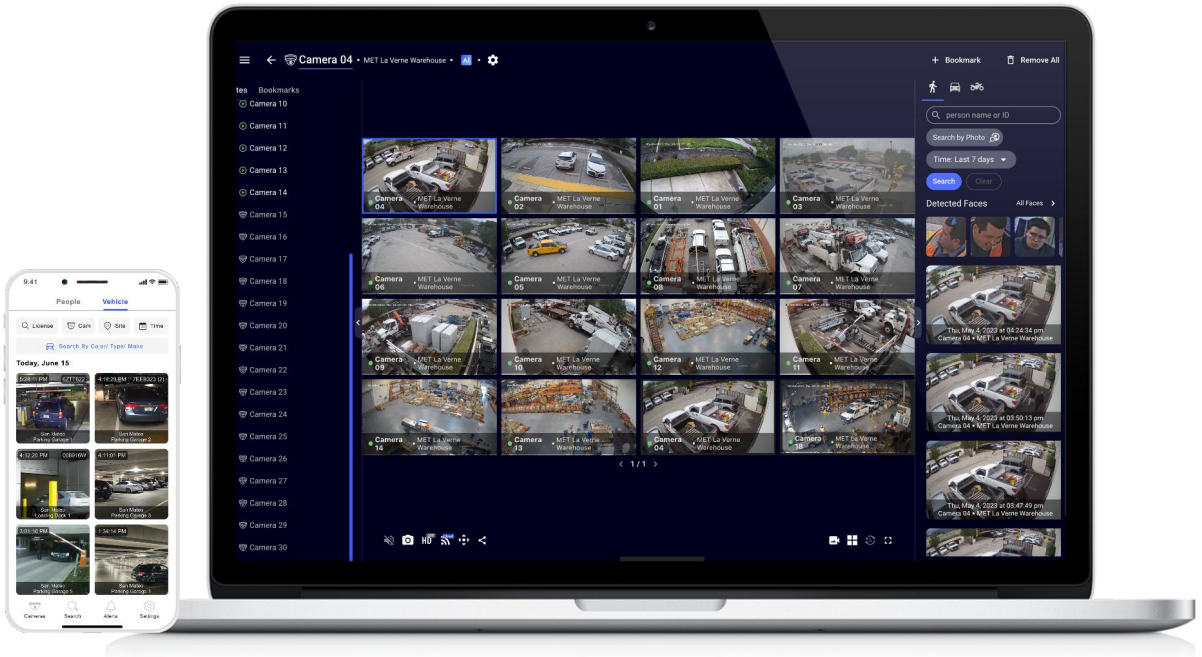

KEY FEATURES



Receive Instant Smart Alerts for Intruders/Trespassers/Person of Interest/Vehicle of Interest via SMS/Email/Push Notifications

Remote Live Stream Monitoring



- Remote Live Streaming up to 16 Cameras in HD
- Bookmark and Auto-Cycle Play for Live Monitoring



Share Live Camera Streams With First Responders



Find Events Fast with Smart Video Search and Archive/Share for Future Reference



View Live Footage From any Desktop / Mobile Device



Flexible Hybrid Storage Locally or on the Cloud